




18783

IP66 Wall Mounted Interlocking Switched Socket

Technical Drawing

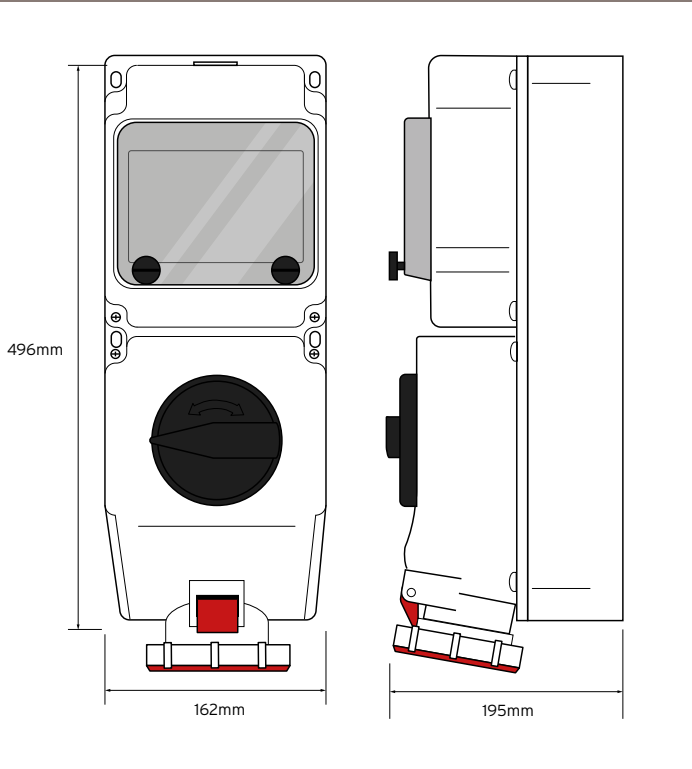

Technical Specifications

Material Composition	PC/ABS Housing
Amps	63A
Volts	415V
Poles	5
No. modules	5
Pin Configuration	3 p + E + N
Cable Entry	Top(40mm), bottom(40mm), rear(40mm+50mm) inc. threaded blind cap.
Operating Temperature	-25 + 40 °C
Wire Flexible mm ²	6-16
Wire solid mm ²	6-25
IP Rating	IP66/67
Certified	ÖVE & CE
Standards	BS EN 60309-1&2
Dimensions	496 x 162 x 195mm

