

# FLSMD SITE FLOODS

## MULTI-VOLTAGE

FLSMD is a range of tough and robust floodlights designed for site applications. Featuring a multi-voltage supply driver, FLSMD can be used in virtually any project.



### Features

- Symmetrical 120° distribution
- Convenient multi-voltage drivers
- Tough die-cast construction
- Pre-wired with 1m cable



### Specification

Code	Description	Lumen Output	Emergency Lumen Output	Wattage	Efficacy
FLSMD50Y-1	FLSMD Site Floodlight 50W	4000lm		50W	80 lm/W

### Product Information

Warranty	3 Years
Colour Appearance (CCT)	6500K
IP Rating	IP65
IK Rating	IK07
Voltage	110V
Material (Body/Housing)	Die-Cast Aluminium
Material (Diffuser/Cover)	Tempered Glass
Colour Rendition (CRI)	Ra >70

Colour Finish	Yellow RAL1007
LED Life Expectancy	L70B50 35,000 Hours
Power Factor	0.9
Frequency	50/60Hz
Driver Type	Fixed Output
Approval	UKCA CE
Electrical Class	Class I
Working Temperature	-20°C to 40°C





# FLSMD SITE FLOODS

## MULTI-VOLTAGE

### Packaging Information

Dimensions (mm)	L: 310 x W: 310 x D: 65 mm
Product Net Weight (kg)	2.24 kg
Barcode	5055807618564
Box Dimensions (mm)	L: 320 x W: 320 x D: 90 mm
Box Gross Weight (kg)	2.4 kg

Units/Outer Carton	5
Outer Carton Barcode	15055807618561
Outer Carton Dimensions (mm)	L: 485 x W: 345 x D: 340 mm
Outer Carton Gross Weight (kg)	13.56 kg

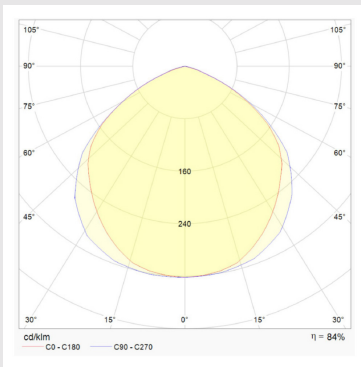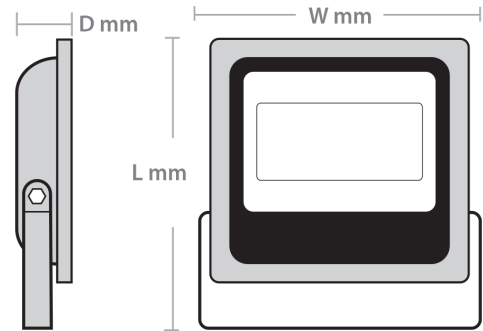

**ENERGY**  
Red Arrow  
FLSMD

A  
B  
C  
D  
E  
F  
G

**E**

50-200  
kWh/1000h

5055807618564